


Part Numbering System

(Example:TACD series 250V 0.82μF)

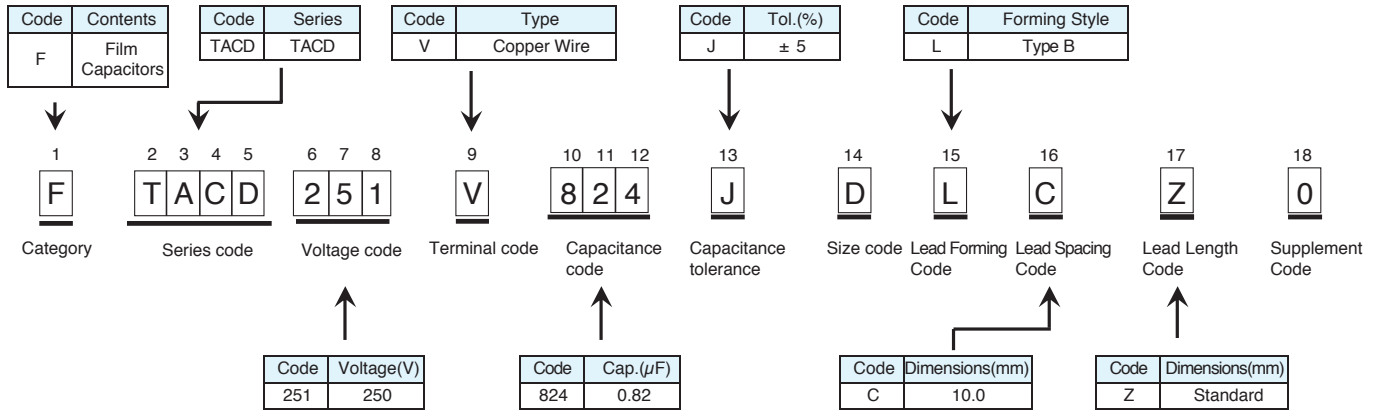

*Others (Refer to the standard ratings .)

(Series code)

| Code | Series name |
|------|-------------|
| TACE | TACE |
| TACD | TACD |
| TACC | TACC |
| TACB | TACB |
| HACE | HACE |


| Code | Series name |
|------|-------------|
| HACD | HACD |
| HACB | HACB |

(Size code)

This is eigenvalue. The details are standard ratings.

(Lead Forming Code)

| Code | Type |
|------|---------------|
| A | Straight lead |
| F | Type A |
| L | Type B |



(Voltage code)

| Code | Voltage(V) |
|------|------------|
| 251 | 250 |
| 3B1 | 315 |
| 401 | 400 |
| 501 | 500 |
| 631 | 630 |

| Code | Voltage(V) |
|------|------------|
| 801 | 800 |
| 102 | 1000 |
| 1C2 | 1250 |
| 152 | 1500 |
| 162 | 1600 |

| Code | Voltage(V) |
|------|------------|
| 182 | 1800 |
| 202 | 2000 |
| 252 | 2500 |
| 3B2 | 3150 |
| 402 | 4000 |

(Lead Spacing Code)

| Code | Dimensions(mm) |
|------|----------------|
| B | 7.5 |
| C | 10.0 |
| G | 12.5 |
| D | 15.0 |
| O | 16.5 |
| H | 17.5 |
| N | 20.0 |
| 1 | 21.5 |
| E | 22.5 |

| コード | Dimensions(mm) |
|-----|----------------|
| P | 25.0 |
| 2 | 26.5 |
| F | 27.5 |
| Q | 30.0 |
| J | 37.5 |
| 4 | 41.5 |
| W | 47.5 |
| 5 | 51.5 |

(Terminal code)

| Code | Terminal |
|------|-----------------------------------|
| V | Tin plated copper wire |
| U | Tin plated copper clad steel wire |
| N | 4 terminals tab |

(Capacitance code)

Unit of capacitance with (pF),and a sign of capacitance expresses it in 3 characters.
significant digit(two columns) + index(one column) unit : pF
(Example :1μF[1,000,000pF]="105")

(Capacitance tolerance code)

| Code | tolerance(%) |
|------|--------------|
| H | ±3 |
| J | ±5 |
| K | ±10 |

(Lead Length Code)

| Code | Dimensions(mm) |
|------|----------------|
| M | 5.0 |
| S | Special |
| Z | Standard |

(Supplement Code)

This is eigenvalue. The details are standard ratings.